# PRODUCE SPECIFICATIONS ATS 5 ULTRA-PORTABLE TRAILER



# ATS-5 Trailer is compatible, interchangeably, with the following products:

- Shield 15 (Sh15) Radar Speed Display
- SpeedAlert 18 or 24 (SA18 or SA24) Radar Message Sign
- InstAlert 18 or 24 (iA18 or iA24) Variable Message Sign
- 5' minimum to bottom of sign

#### Weight

- 620 lbs with 235Ah battery capacity and SpeedAlert 18
- 760 lbs with 470Ah battery capacity InstAlert
  - o Add 130 lbs for additional battery pair
  - o Add 60 lbs for 120W solar panel
  - o Add 40 lbs for 65W solar panel
- Tongue weight: 20 lbs
- **Dimensions:** 61.5" long x 62.5" wide x 64" high (stowed)
- Simple manual lever lift system for 1-person setup
- Removable tongue for 2" ball, lockable
- Storage for tongue and lift bar in locked battery compartment
- 16 ga. steel locking battery compartment with vented battery chamber, charger/accessories chamber and 1/8" aluminum diamond plate lid
- Continuous weld steel frame, white marine grade powder coat ffnish
- Wheels: 12," ive bolt steel rims with 4.5" bolt circle
- Ground Clearance: 9.75 under axle, 19 under chassis
- Replaceable steel fenders, weight supporting
- Locking wheel lug bolts, one per wheel, with removal tool
- Axle: 2000# leaf spring
- **Jacks:** 4, retractable crank type, fully adjustable at each corner, 1500 lb capacity each
- Recessed tail lights and DoT approved lighting
- Safety chains, 23" with hooks
- DoT approved red/white re lective tape
- License plate holder with light

## **ATS-5 Trailer Power**

- 12 VDC system, standard four pin wiring plug
- 235Ah or 470Ah batteries, (2) 6VDC batteries in series, deep cycle marine (130 lbs per pair, two pair max)
- 20A time delay fuse on battery supply
- 65W solar assist with 10A solar controller to prevent overcharging, other solar wattages available
- Solar panels charge while sign stowed or deployed
- 10 Amp 120VAC automatic charger with externally accessible AC connection
- Switch to control power to sign

### **ATS-5 Trailer Options**

- 30" x 36" speed limit sign and interchangeable digits for 5-65 mph display and locking hitch pin for display and stowing; digit storage in battery compartment
- Red and Blue violator strobe light bar, set to flash above user set speed
- Low voltage disconnect solar controller to turn off sign if power falls below 11.5VDC (decreases run time)
- Two 5/16 ball or pintle hook, adjustable height, on removable tongue
- Orange powder coat finish (minimum order quantity)
- AGM sealed batteries for lower temperature use, -40F (185Ah per pair, 370Ah max)
- Tamper alarm with adjustable sensitivity
- Wheel lock bar
- '7' digit for speed limit sign
- 14" tires and fenders
- Speed dependent messaging option

#### Warranty


• 1-year warranty (three months on batteries)

#### **Compatible with these ATS Products**


- 1. ATS-5 with SpeedAlert 24 (optional light bar)
- 2. ATS-5 with SpeedAlert 18





ATS Trailer: Deployed with SpeedAlert 24



ATS Trailer: Stowed with SpeedAlert 24



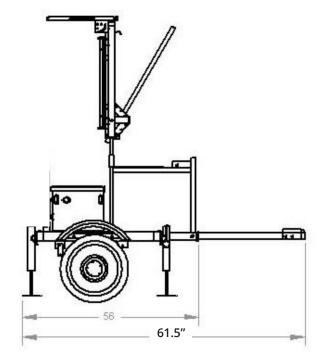



#### All Traffic Solutions 12950 Worldgate Drive, Suite 310, Herndon, VA 20170

©All Traffic Solutions TraffiCloud leverages our patented technology (US Patents 8417442; 8755990; 9070287; 9411893) to deliver unique cloud-based management, features and functionality. TraffiCloud is a registered trademark of All Traffic Solutions.